


RAMCO

HARD WORKER



TILE FIX **EPOXY**

HW205

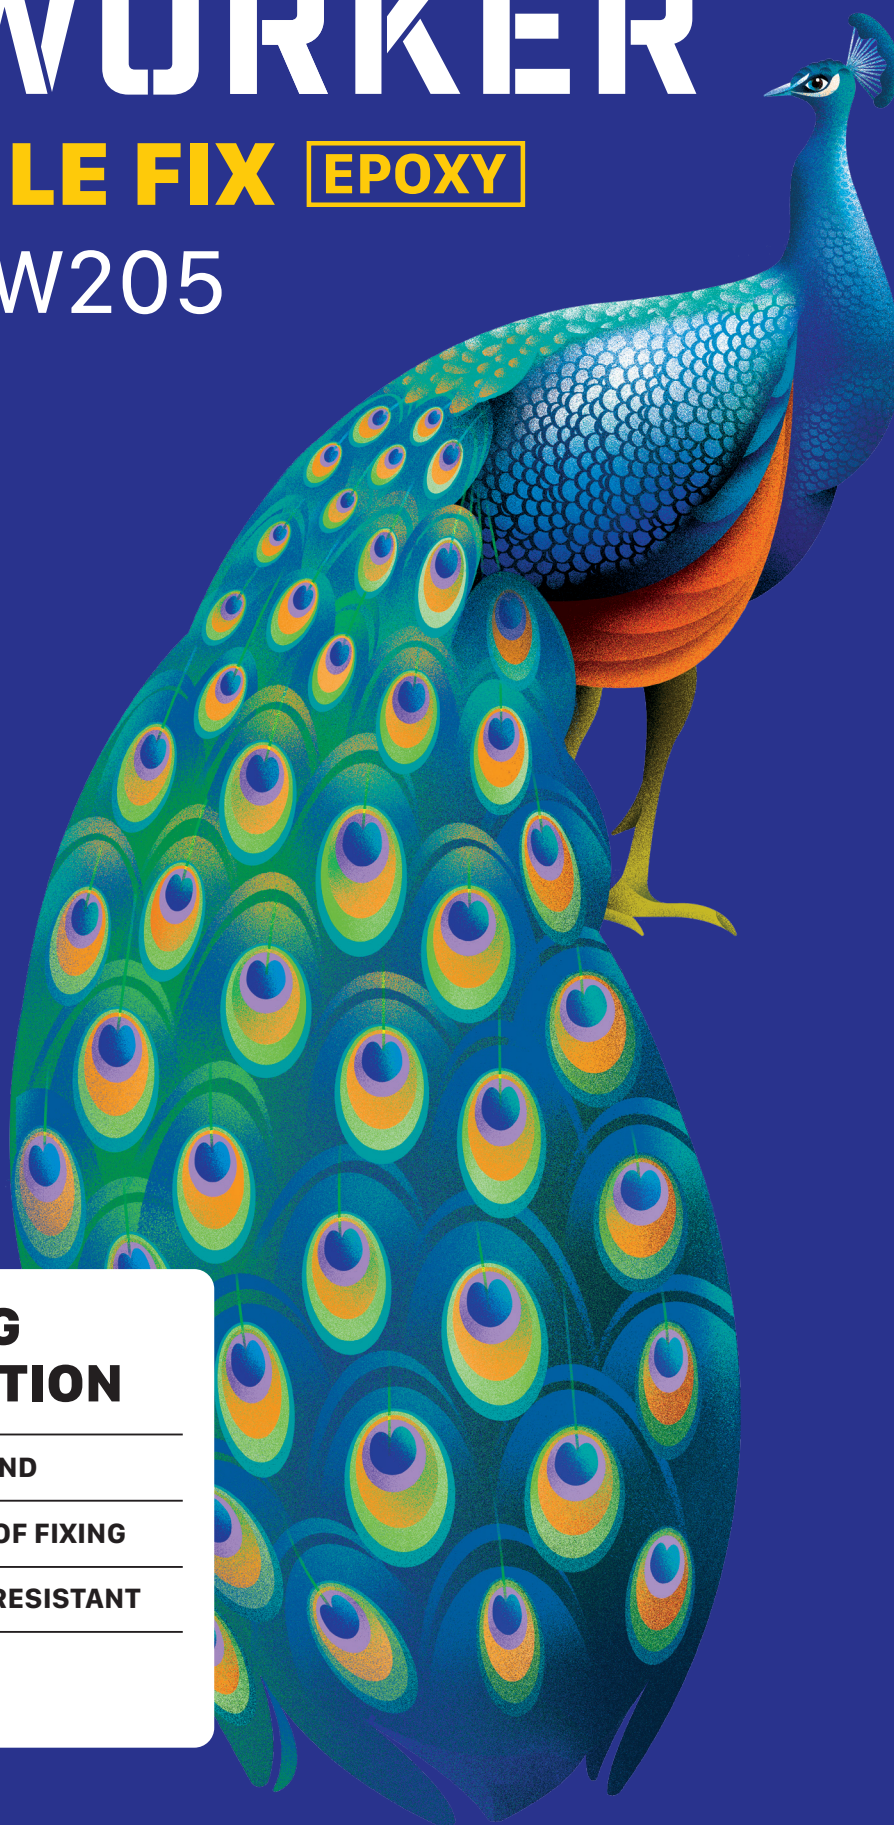

LASTING PERFECTION

- ★ STRONG BOND
- ★ WATERPROOF FIXING
- ★ CHEMICAL RESISTANT

12KG

Why HW Tile Fix – Epoxy?

LASTING PERFECTION

Tiles exposed to thermal movements, harsh chemicals, or constant water exposure need a strong companion - HW Epoxy Tile Fix is built just for them. This ready to use three-component enhanced adhesive creates a precision bond that grips hard — for walls or floors, indoors or out, and for larger, denser tile types that require stronger grips. From glass and metal to natural stone, it bonds across all substrates with zero slip, zero shrinkage. The result: a finish that stays firm through stress, traffic, moisture, and time.

STRONG BOND

Locks tight. Bonds across substrate types - glass, metal, drywalls, aluminium panels, gypsum boards, tile, stone, and wood. Resists slip and stress. Once placed, it stays.

WATERPROOF FIXING

Built for wet zones. Keeps tile secure in bathrooms, balconies, kitchens, pools ensuring there are no leaks, no lifting.

CHEMICAL RESISTANT

Resists oils, alkalis, acids and cleaning agents. Ideal for industrial floors, labs, and commercial kitchens.

STABLE FIX

Tiles don't slip mid-application even on vertical walls or in tricky placements on smooth non-absorbing surfaces. Fix the tiles and let HW205 hold.

HANDLES EXTREMES

Performs through heat, moisture, vibrations and regular cleaning; a tile bond that's made to endure.



ADJUSTABLE TIME
50 MINS



TEMPERATURE VARIATION
0° to 80°C




POT LIFE



APPLICATION



Clean the surface.




Add three Tile Fix components.

Pour Hardener into Resin and mix to a uniform paste. Then add Filler and mix.




Mix to a thick paste with a blender.

Use a slow-speed blender for a homogeneous paste.



Apply with a notch trowel.



Apply on the back of the tile.



Fix the tile.

Press tile firmly with a slight twisting motion. Fix within 40 mins of applying HW205.



Scan to watch Application Video.

Toll Free No: 1800 202 5700
customer@ramcocements.co.in