


RAMCO

HARD WORKER

TILE FIX

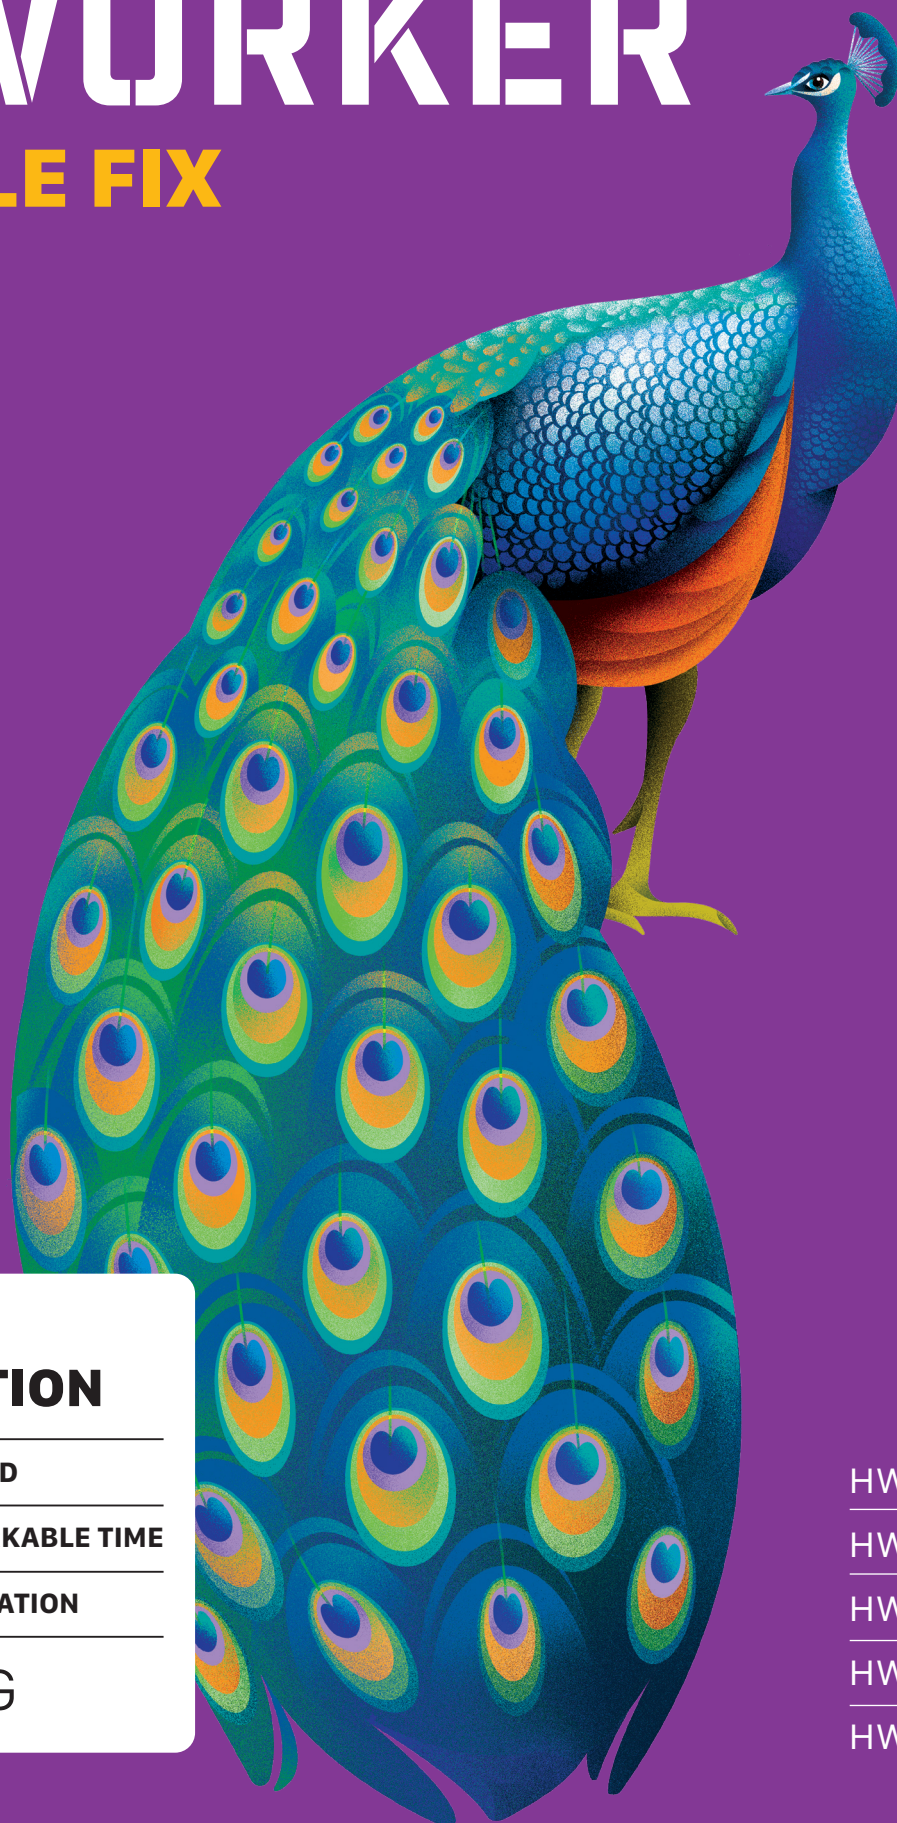

LASTING PERFECTION

- ★ **STRONG BOND**
- ★ **LONGER WORKABLE TIME**
- ★ **EASY APPLICATION**

20/ 40KG

HW201

HW202

HW203

HW204

HW206

Why HW Tile Fix?

LASTING PERFECTION

Tiles are prone to move, fall or break if improperly fixed. Not the ones fixed with Hard Worker Tile Fix. Built for lasting alignment and zero rework. HW Tile Fix creates a precision adhesive layer between 3 mm - 12 mm thickness. Application thickness depends on the Tile Fix Variant and type of tile. This adhesive holds strong across tile types, surfaces and site conditions. From small ceramic floors to heavy stone cladding, it delivers a clean, confident finish that doesn't shift over time. No prop-up. No edges lifting. Just a finish that stays even with daily wear and movement.

STRONG BOND

Unlike cement-sand mixes, HW Tile Fix forms a stronger bond with the substrate such as concrete, screed, plaster or even old tiles. The result: a locked-in hold; indoors or out.

LONGER WORKABLE TIME

20 minutes of open time means no rush. Whether it's a tricky edge or a full slab grid, there's space to adjust and align without compromising strength.

EASY APPLICATION

Just add water, mix and spread. The smooth paste applies easily with a notched trowel. Thus saving time and keeping things clean from start to finish.

RESILIENT

The adhesive withstands water, air, heat, and humidity movement - keeping tiles stable through temperature shifts, daily wear and exposure.

Variant / Adhesive Thickness	Tile Types
Standard T1 3 mm – 6 mm	All types of ceramic tiles
Medium T2 3 mm – 6 mm	Small format vitrified tiles
High T3 6 mm – 12 mm	Large format vitrified tiles, tile-on-tile
Max T4 6 mm – 12 mm	Granite, marble, natural stone, and cladding
Max-White T4 6 mm – 12 mm	Specialized applications like fixing swimming pool tiles, glass tiles, etc.

60-80
SQFT

COVERAGE PER
20 kg BAG

30
MINS


HIGH ADJUSTABLE
TIME

ALL
VARIANTS

BIS CERTIFIED



APPLICATION




Prepare and pre-wet wall / floor.




Add Tile Fix to water.

25 to 30% water by weight.




Mix to a thick paste using a blender.

Use a slow speed blender for lump-free consistency.



Apply with a notch trowel.

3-12 mm based on tile dimensions (refer our chart)



Apply on the back of the tile.

Full coverage for hold.



Fix tile.

Press and position within open time, adjust using rubber mallet.



Scan to watch Application Video.

Toll Free No: 1800 202 5700
customer@ramcocements.co.in